
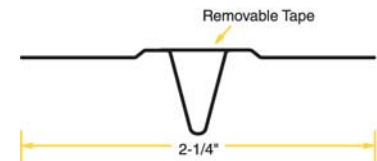


## 093 E-Z Strip<sup>®</sup> Vinyl Expansion Control Joint

### Product Benefits

The Phillips gripSTIK<sup>®</sup> 093 E-Z Strip<sup>®</sup> Expansion Control Joint is designed to relieve the stresses of contraction and expansion. This product allows for structural movement of up to 1/4" in drywall systems. It is an extruded vinyl expansion control joint typically used in ceilings or partitions. The expansion control joint groove is protected by plastic tape that can be easily removed after the joint finishing material has dried, leaving a clean well-formed joint. Phillips gripSTIK<sup>®</sup> 093 E-Z Strip<sup>®</sup> Expansion Control Joint features many advantages and benefits:

- Easy Installation: Staples easily in place.
- Easy to Cut: The control strip can be cut with shears, a knife or a fine-toothed hacksaw.
- Dent Resistant: Retains original shape.
- Ignition resistant: Rigid vinyl is self extinguishing and will not continue to support combustion once flame source is removed, therefore, it will not cause a fire to re-start or spread.
- Durable and impact resistant products manufactured from PVC. The vinyl material is unaffected by cold or heat up to 150°F (65°C).
- Impervious to rust, corrosion, galvanic corrosion and electrolysis and are not affected by fast setting joint compounds or topping compounds.
- Perforated flanges for excellent joint compound adhesion as the joint compound penetrates through the flange to the drywall to enhance long-lasting adhesion.
- Expansion control joint groove is protected by a plastic tape that can be easily removed after the joint finishing material has dried, leaving a clean well-formed joint.
- Deeply knurled mud anchors on flanges enhance joint compound adhesion.
- Works great for drywall, veneer and exterior soffit board applications.

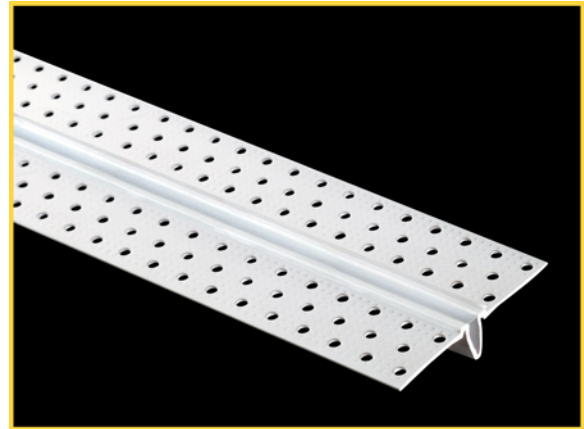

### Certification

Phillips gripSTIK<sup>®</sup> 093 E-Z Strip<sup>®</sup> Expansion Control Joint meets or exceeds ASTM C1047 Standard Specification for Accessories for Gypsum Wallboard, ASTM D3678-97 and ASTM D1784-03.

### Technical Data

Grounds: 0.093" (2.3mm) from face of wallboard.

Composition & Materials: Extruded flexible vinyl. Contains no asbestos.

### Limitations

Where fire and or sound ratings are a prime consideration, adequate protection must be provided behind the joint (reference Gypsum Association GA-234 and GA-600).

The Phillips gripSTIK<sup>®</sup> 093 E-Z Strip<sup>®</sup> Expansion Control Joint is designed to control expansion or contraction not greater than 1/4". When greater than 1/4" movement is anticipated or where both vertical and horizontal movement is anticipated this expansion control joint should not be used.

### Storage

Avoid damage and store in a covered area away from direct sunlight.

The information and recommendations contained herein are, to the best of Phillips Manufacturing Company's knowledge and belief, accurate and reliable as of the date issued. Phillips Manufacturing Company has no control over the conditions of handling and use, and makes no warranty regarding the results obtained from the use of this data. The information and recommendations are offered for the user's consideration and examination, and it is the user's responsibility to determine that they are suitable and complete for its particular use. Phillips reserves the right to make alterations and amendments to the detailed specifications at its discretion. Phillips disclaims responsibility for all actions, proceedings, liabilities, claims, damages, cost, losses, and expenses in relation to, or arising out of, incorrect utilization of this information.



# Submittal Form



## 093 E-Z Strip<sup>®</sup> Vinyl Expansion Control Joint

### Installation Recommendations

Phillips recommends installation in accordance with applicable ASTM standards and using prevalent industry standards. Reference materials are ASTM C840, ASTM C844, Gypsum Association GA-216 and Gypsum Association GA-234 (Fire-Resistant Application). Phillips detailed installation recommendations are available at [www.phillipsmfg.com](http://www.phillipsmfg.com).

---

### Submittal Approvals:

Job Name: \_\_\_\_\_

Contractor: \_\_\_\_\_ Date: \_\_\_\_\_

The information and recommendations contained herein are, to the best of Phillips Manufacturing Company's knowledge and belief, accurate and reliable as of the date issued. Phillips Manufacturing Company has no control over the conditions of handling and use, and makes no warranty regarding the results obtained from the use of this data. The information and recommendations are offered for the user's consideration and examination, and it is the user's responsibility to determine that they are suitable and complete for its particular use. Phillips reserves the right to make alterations and amendments to the detailed specifications at its discretion. Phillips disclaims responsibility for all actions, proceedings, liabilities, claims, damages, cost, losses, and expenses in relation to, or arising out of, incorrect utilization of this information.