


## 7/8" # 7 Shear Screed

#7 Shear Screed provides a stucco stop and screed for shear walls in exterior stucco applications. The 3-1/2" nailing flange serves as a straight-edge stop at the sill plate line and flashing when water-resistant paper or paper backed lath is installed over the flange at the sill plate line in exterior stucco applications. Punched weep holes enable keying as well as moisture weeping and perforated flanges aid attachment and plaster keying. The 7/8" Shear Screed is typically used with 7/8" three coat cement stucco systems. Also available in zinc.

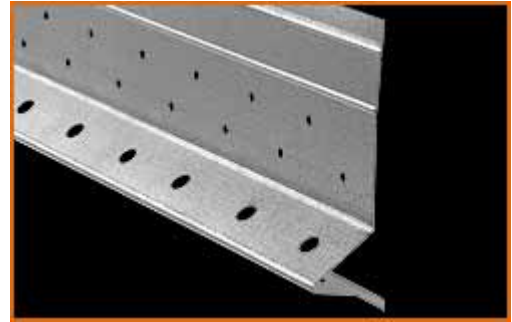

### Product Data and Ordering Information

Material: 0.018 galvanized steel or zinc  
Part Number: SS8HDG

Length	Pieces Per Carton	Cartons Per Pallet	Feet Per Carton
10'	10	50	100


All Phillips products are made in the U.S.A.

### ASTM and Code Standards

Phillips #7 Shear Screed meets or exceeds:

- ASTM C 1063 Standard Specification for Installation of Lathing and Furring to Receive Interior and Exterior Portland Cement-Based Plaster
- Zinc: 99.95% pure special high grade zinc ASTM B69

SDS and other technical information available at [www.phillipsmfg.com](http://www.phillipsmfg.com)



*Drawing not to scale*

### Leed Credits for Recycled Content

MR2 – The steel and vinyl used in Phillips Manufacturing products is 100% recyclable.

MR4 – Phillips Manufacturing steel and vinyl products have a minimum of:

Total recycled content:	30%
Post-consumer recycled content:	25%
Pre-consumer recycled content:	5%

### Storage

Avoid bending or other damage and store in a dry place protected from moisture.