


1/2" #15 Double V Expansion Control Joint

#15 Double V Expansion Joint relieves the stresses of expansion and contraction associated with natural shrinkage during stucco curing and basic thermal changes. This product minimizes cracking in large plaster areas and provides ground to assure proper plaster or stucco thickness. Expanded flanges allow for quality keying. Available in both hot-dipped galvanized or zinc. (1/4" and 7/8" special order, minimum quantities may apply.)

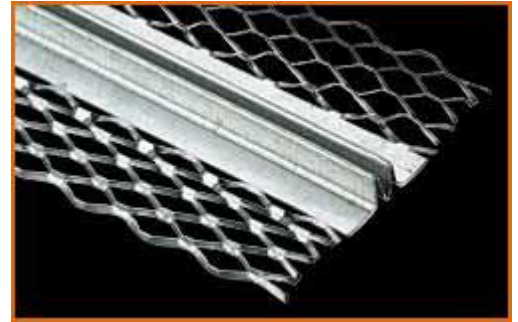

Product Data and Ordering Information

Material: .0.012 min thickness, galvanized steel or zinc
Dimensions: 1-3/4" leg
Part Number: 15ECJ5

Length	Pieces Per Carton	Cartons Per Pallet	Feet Per Carton
10'	24	40	240

All Phillips products are made in the U.S.A.

ASTM and Code Standards

Phillips #15 Double V Expansion Joint meets or exceeds:

- ASTM A653 Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
- Zinc: 99.95% pure special high grade zinc ASTM B69

SDS and other technical information available at www.phillipsmfg.com.

Leed Credits for Recycled Content


MR2 – The steel and vinyl used in Phillips Manufacturing products is 100% recyclable.

MR4 – Phillips Manufacturing steel and vinyl products have a minimum of:

Total recycled content: 30%
Post-consumer recycled content: 25%
Pre-consumer recycled content: 5%

Storage

Avoid bending or other damage and store in a dry place protected from moisture.



Drawing not to scale