


1.75 Paper Backed Flat Diamond Mesh Lath

Asphalt saturated kraft building paper has been applied to the lath to control moisture, air flow and reduce air infiltration resulting in improved energy efficiency. Easy to install and ideal as a base for stone, ceramic tile and traditional stucco. The paper backing aids in plaster keying and stucco curing, protection of the sheathing during curing and forms the vertical surface behind the exterior wall cladding (stucco, brick, siding, etc.) that allows moisture to safely drain out of the wall system. Paper back is available with Flat Diamond Mesh Lath, Self-Furring Dimpled Diamond Mesh Lath and Self-Furring V-Groove Mesh Lath.

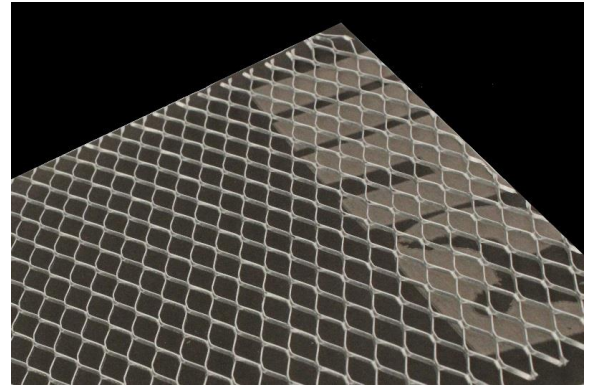

Product Data and Ordering Information

Material: Hot-dipped galvanized
Part Number: 175GLHDG8PB3

| Std Wt./ Sq. Yd. | Sheet Size | Pieces Per Bundle | Bundles Per Pallet | Sq. Yds. Per Bundle |
|---------------------|---------------|----------------------|-----------------------|------------------------|
| 1.75 | 27" x 97" | 10 | 25 | 500 |

All Phillips products are made in the U.S.A.

ASTM and Code Standards

Phillips Diamond Lath products meets or exceeds:

- ASTM A653 Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.
- Federal Specification UU-B-790A; Style 1, Grade D, Style 2 which is printed on the paper for easy identification.

SDS and other technical information available at www.phillipsmfg.com.

Leed Credits for Recycled Content

MR2 – The steel and vinyl used in Phillips Manufacturing products is 100% recyclable.

MR4 – Phillips Manufacturing steel and vinyl products have a minimum of:

| | |
|---------------------------------|-----|
| Total recycled content: | 30% |
| Post-consumer recycled content: | 25% |
| Pre-consumer recycled content: | 5% |

Storage

Avoid bending or other damage and store in a dry place protected from moisture.