


## 3/4" Metal Bullnose Splay Corner Beads


Metal Drywall Corner Beads provide superior corrosion protection. Bullnose profiles are available in both 3/4" and 1-1/2" radius. Flanges have deeply knurled mud anchors and etched surfaces for ease of joint compound adhesion and nail attachment. This drywall finishing product is nailed, stapled, screwed or clinched into place.

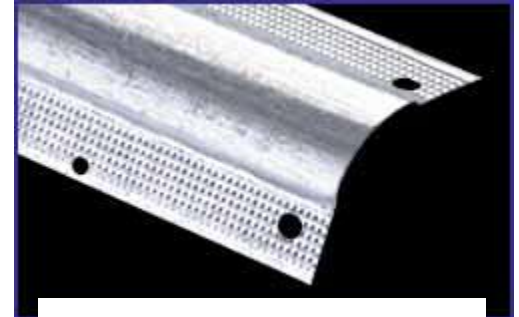

### Product Data and Ordering Information

Material: .0014 min thickness, minimum G40 galvanized  
 Dimensions: 3/4"  
 Part Number: BS3EGB

Length	Pieces Per Carton	Cartons Per Pallet	Feet Per Carton
7'	72	48	504
8'	63	48	504
9'	56	48	504
10'	50	48	500
12'	42	48	504

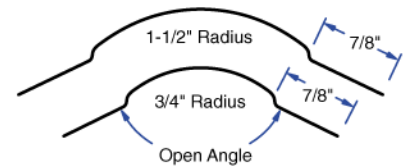

*Drawing not to scale*

All Phillips products are made in the U.S.A.

### ASTM and Code Standards

All Phillips® Metal Corner Beads meet or exceed the following ASTM standards:

- ASTM C1047 Standard Specification for Accessories for Gypsum Wallboard
- ASTM A653 Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

SDS and other technical information available at [www.phillipsmfg.com](http://www.phillipsmfg.com).

### Leed Credits for Recycled Content

MR2 – The steel and vinyl used in Phillips Manufacturing products is 100% recyclable.  
 MR4 – Phillips Manufacturing steel and vinyl products have a minimum of:

Total recycled content:	30%
Post-consumer recycled content:	25%
Pre-consumer recycled content:	5%

### Storage

Avoid bending or other damage and store in a dry place protected from moisture.

### Leed v4 for building and Design Construction

- MR Prerequisite: Construction and Demolition Waste Management Planning.
- MR Credit: Construction and Demolition Waste Management.
- MR Credit: Building Product Disclosure and Optimization Sourcing of Raw Materials, Option2.
- MR Credit: Building Product Disclosure and Optimization Environmental Product Declaration, Options 1 & 2.
- MR Credit: Building Product Disclosure and Optimization Material Ingredients, Option 1.
- MR Credit: Building Life-Cycle Impact Reduction, Option 4