


ShadowFree® Corner Bead

Exclusive ShadowFree® metal drywall corner beads provide lasting corner protection to exposed drywall edges. Color primed surface cuts finishing time as well as adding texture to the already deeply knurled mud anchors on flanges for excellent mud adhesion. Available in square, splay (off-angle), bullnose and bullnose splay. Bullnose profiles provide smooth, rounded finishes and are available in both 3/4" and 1-1/2" radiuses.

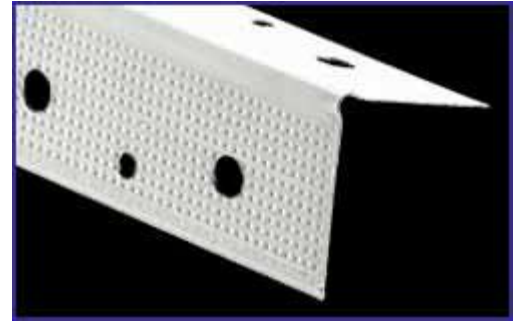


Product Data and Ordering Information⁴

Material: .0.012 min thickness, minimum G40 galvanized
Dimensions: 1-1/4" leg x 1-1/4" leg
Part Number: CBRSF

Length	Pieces Per Carton	Cartons Per Pallet	Feet Per Carton
7'	72	48	504
8'	63	48	504
9'	56	48	504
10'	50	48	500
12'	42	48	504

All Phillips products are made in the U.S.A.



ASTM and Code Standards

Phillips ShadowFree® corner beads meets or exceeds:

- ASTM C1047 Standard Specification for Accessories for Gypsum Wallboard
- ASTM A653 Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

SDS and other technical information available at www.phillipsmfg.com

Leed Credits for Recycled Content

MR2 – The steel and vinyl used in Phillips Manufacturing products is 100% recyclable.

MR4 – Phillips Manufacturing steel and vinyl products have a minimum of:

Total recycled content:	30%
Post-consumer recycled content:	25%
Pre-consumer recycled content:	5%

Storage

Avoid bending or other damage and store in a dry place protected from moisture.

Leed v4 for building and Design Construction

- MR Prerequisite: Construction and Demolition Waste Management Planning.
- MR Credit: Construction and Demolition Waste Management.
- MR Credit: Building Product Disclosure and Optimization Sourcing of Raw Materials, Option2.
- MR Credit: Building Product Disclosure and Optimization Environmental Product Declaration, Options 1 & 2.
- MR Credit: Building Product Disclosure and Optimization Material Ingredients, Option 1.
- MR Credit: Building Life-Cycle Impact Reduction, Option 4